

ZGSM-LD60KM

Introducing a New Premium Experience




Specifications

Electrical Specifications:







Model No.	ZGSM-LD60KM
Nominal Wattage	60W
Nominal Voltage	AC 100-240V /277V, 50/60Hz/DC 24V
LED Brand	Philips Lumileds
Driver Brand	Meanwell /Inventronics Driver
Optional Function	OLC, NTC, StepDIM, 0(1)-10V, DALI
Operating Temperature	-40 °C to +50 °C
Power Factor (PF)	> 0.9
THD	< 20
Protection	Class I (Class II optional)
SPD	10KV (20KV optional)

Photometric Specifications:

Lumen Output	3030: 7800 lm (±5%) 5050: 9000 lm (±5%)
Optic	TYPE I, TYPE II, TYPE II BLS, TYPE III
CRI	Ra ≥ 70 (80 optional)
CCT	

Mechanical Specifications:

Ratings	IP66, IK08
Lifetime	> 100, 000 hours -L70, @25 °C (77 °F)
Body	Die-cast Aluminum Housing and Tempered Glass
Pole Fitter Diameter	60mm (50mm optional)
Lens	PC
Fixture Dimension	726 x357 x127 mm
Packing Dimension	785 x410 x160 mm
Fixture Weight	7.8 kg
Packing Weight	9.5 kg

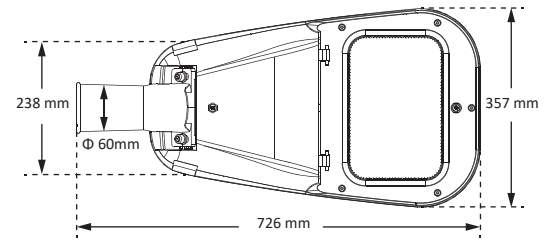

Optional accessories:



ZGSM-LD90KM

Introducing a New Premium Experience




Specifications

Electrical Specifications:







Model No.	ZGSM-LD90KM
Nominal Wattage	90W
Nominal Voltage	AC 100-240V /277V, 50/60Hz/DC 24V
LED Brand	Philips Lumileds
Driver Brand	Meanwell /Inventronics Driver
Optional Function	OLC, NTC, StepDIM, 0(1)-10V, DALI
Operating Temperature	-40 °C to +50 °C
Power Factor (PF)	> 0.9
THD	< 20
Protection	Class I (Class II optional)
SPD	10KV (20KV optional)

Photometric Specifications:

Lumen Output	3030: 11700 lm (±5%) 5050: 13500 lm (±5%)
Optic	TYPE I, TYPE II, TYPE II BLS, TYPE III
CRI	Ra ≥ 70 (80 optional)
CCT	

Mechanical Specifications:

Ratings	IP66, IK08
Lifetime	> 100, 000 hours -L70, @25 °C (77 °F)
Body	Die-cast Aluminum Housing and Tempered Glass
Pole Fitter Diameter	60mm (50mm optional)
Lens	PC
Fixture Dimension	726 x357 x127 mm
Packing Dimension	785 x410 x160 mm
Fixture Weight	8.1 kg
Packing Weight	10.1 kg

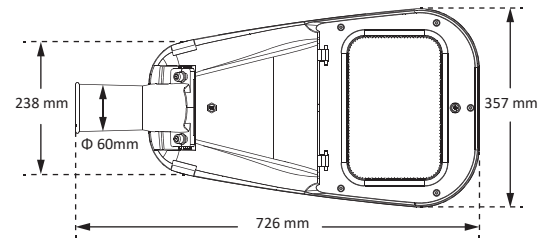

Optional accessories:



ZGSM-LD120KM

Introducing a New Premium Experience




Specifications

Electrical Specifications:






Model No.	ZGSM-LD120KM
Nominal Wattage	120W
Nominal Voltage	AC 100-240V /277V, 50/60Hz/DC 24V
LED Brand	Philips Lumileds
Driver Brand	Meanwell /Inventronics Driver
Optional Function	OLC, NTC, StepDIM, 0(1)-10V, DALI
Operating Temperature	-40 °C to +50 °C
Power Factor (PF)	> 0.9
THD	< 20
Protection	Class I (Class II optional)
SPD	10KV (20KV optional)

Photometric Specifications:

Lumen Output	3030: 15600 lm (±5%) 5050: 18000 lm (±5%)
Optic	TYPE I, TYPE II, TYPE II BLS, TYPE III
CRI	Ra ≥ 70 (80 optional)
CCT	

Mechanical Specifications:

Ratings	IP66, IK08
Lifetime	> 100, 000 hours -L70, @25 °C (77 °F)
Body	Die-cast Aluminum Housing and Tempered Glass
Pole Fitter Diameter	60mm (50mm optional)
Lens	PC
Fixture Dimension	726 x357 x127 mm
Packing Dimension	785 x410 x160 mm
Fixture Weight	8.2 kg
Packing Weight	10.2 kg

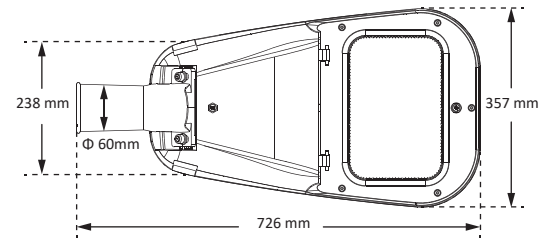

Optional accessories:



ZGSM-LD150KL

Introducing a New Premium Experience




Specifications

Electrical Specifications:






Model No.	ZGSM-LD150KL
Nominal Wattage	150W
Nominal Voltage	AC 100-240V /277V, 50/60Hz/DC 24V
LED Brand	Philips Lumileds
Driver Brand	Meanwell /Inventronics Driver
Optional Function	OLC, NTC, StepDIM, 0(1)-10V, DALI
Operating Temperature	-40 °C to +50 °C
Power Factor (PF)	> 0.9
THD	< 20
Protection	Class I (Class II optional)
SPD	10KV (20KV optional)

Photometric Specifications:

Lumen Output	3030: 19500 lm (±5%) 5050: 22500 lm (±5%)
Optic	TYPE I, TYPE II, TYPE II BLS, TYPE III
CRI	Ra ≥ 70 (80 optional)
CCT	

Mechanical Specifications:

Ratings	IP66, IK08
Lifetime	> 100, 000 hours -L70, @25 °C (77 °F)
Body	Die-cast Aluminum Housing and Tempered Glass
Pole Fitter Diameter	60mm (50mm optional)
Lens	PC
Fixture Dimension	861 x447 x153 mm
Packing Dimension	915 x495 x225 mm
Fixture Weight	12.0 kg
Packing Weight	14.5 kg

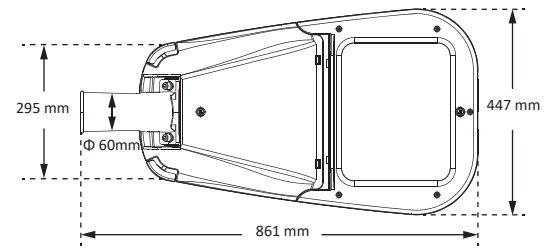

Optional accessories:

